

PYLE®



view

7" TFT LCD SUN VISOR MONITOR



PLVSR71R

Table of Contents

*** MONITOR**

1. SPECIFICATION-----	2
2. FUNCTION KEYS AT FRONT PANEL-----	2
3. FUNCTION DESCRIPTIONS-----	3
4. CONNECTION -----	3
5. REMOTE CONTROL -----	4
6. DIMENSION -----	4
7. SUN VISOR KIT-----	4

WARNING

This unit is not intended for installation in the front Driver / Passenger Compartment where it may be seen by the Driver. Installation of this unit in any portion of the vehicle which could impair or distract the Driver is improper and dangerous and **PYLE view** assumes **No liability** whatsoever for failure to follow the proper installation of this product.

To reduce the risk of electric shock, please do not expose this unit to rain, moisture or open the unit. Dangerous high voltages are present inside the unit.

Our warranty could be voided if you make changes or modifications not expressly approved by **PYLE view**

MONITOR

1. SPECIFICATION


* VIDEO

- SCREEN SIZE ----- 7" DIAGONAL
- RESOLUTION ----- 1440(H) x 234(V)
- COLOR CONFIGURATION ----- RGB Stripe
- DOT PITCH ----- 0.107(H) x 0.372(V)
- VIEWING ANGLE ----- Top: 50 deg. / Bottom: 20 deg.
Left: 45 deg. / Right: 45 deg.

* ELECTRICAL

- COLOR SYSTEM ----- NTSC/PAL Auto Switch
- VIDEO INPUT ----- 1 Vp-p, 75ohms
- POWER COMSUMPTION ----- DC12V 1A MAX. 6VA
- AUDIO OUTPUT POWER ----- 0.5W(MAX)

2. FUNCTION KEYS AT FRONT PANEL:

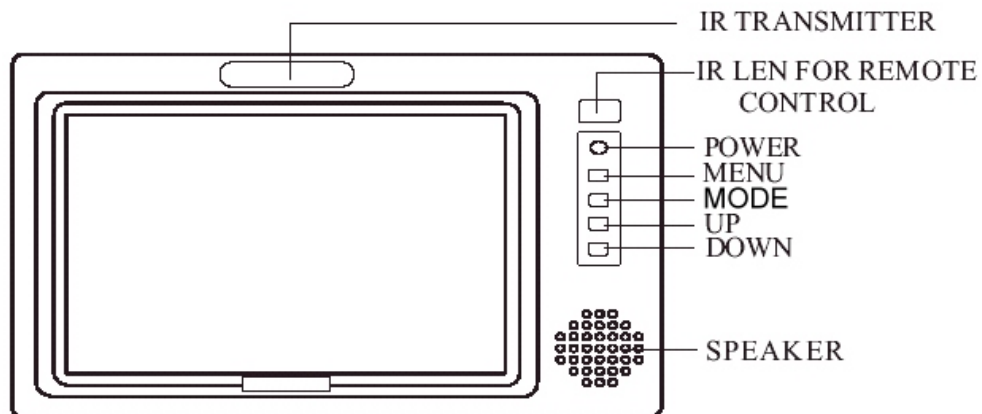

3. FUNCTION DESCRIPTIONS:

- * Power : Press the "POWER" button from the main unit to turn on the monitor.
- * Menu : Press the MENU from the main unit to pop up the OSD functions by turns.
- * Mode : Vedio source swing
- * UP/DOWN : Using menu button together can adjust the other function

OSD Menu:

Main Menu


Press the "MENU" from the main unit to pop up the functions.

Each mode will process by turns, you may use


UP/DOWN together to increase or decrease parameters as well




4. CONNECTION:

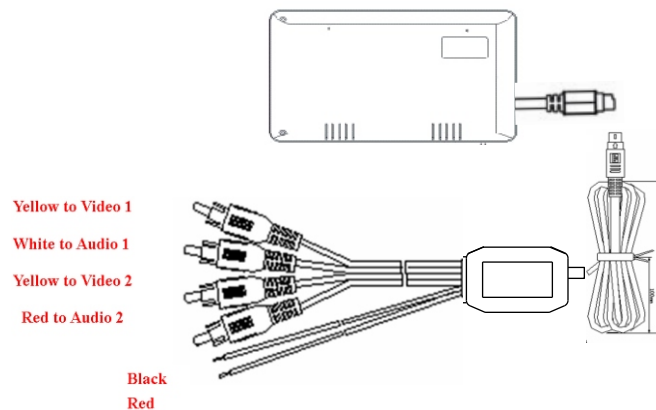

5. REMOTE CONTROL

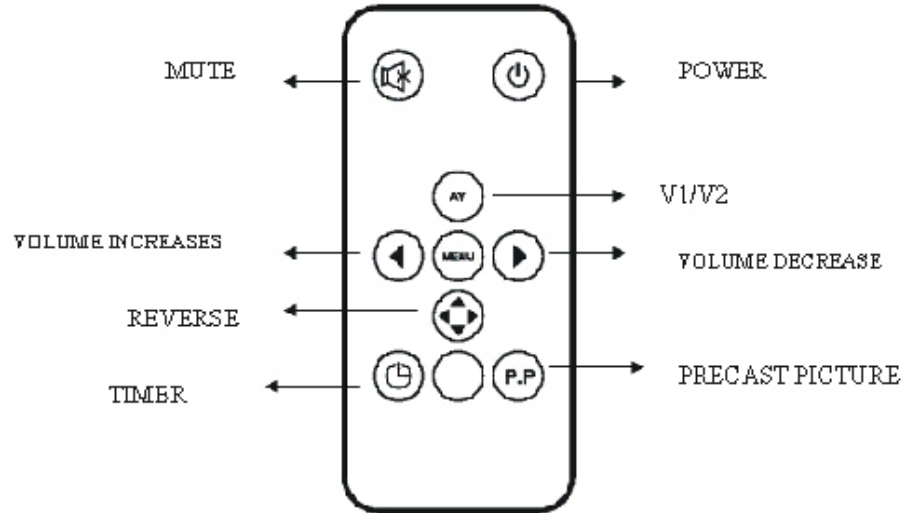

6. DIMENSION

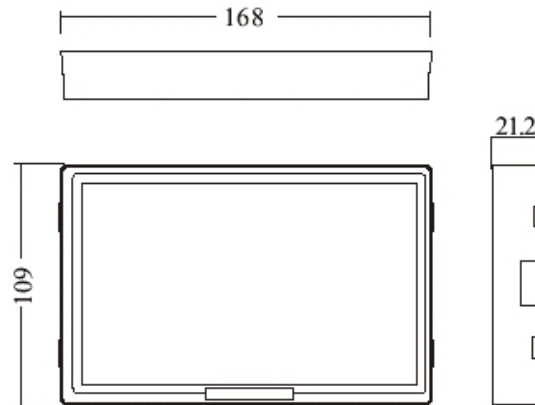

7. SUN VISOR KIT

